


Coupling Self Locking Hook. Code "YL"



| Item No. | Working Load Limit tonnes* | For Grade 80 Chain | Dimensions (mm) | | | | N.W. kg |
|----------|-------------------------------|--------------------------|-----------------|-----|----|----|------------|
| | | mm | H | K | P | T | |
| 8-023-06 | 1.12 | 6 | 19 | 105 | 29 | 15 | 0.5 |
| 8-023-07 | 2.0 | 7, 8 | 24 | 136 | 34 | 20 | 0.8 |
| 8-023-10 | 3.15 | 10 | 30 | 154 | 44 | 26 | 1.3 |
| 8-023-13 | 5.3 | 13 | 39 | 202 | 55 | 30 | 2.8 |
| 8-023-16 | 8.0 | 16 | 49 | 242 | 60 | 36 | 5.7 |
| 8-023-20 | 12.5 | 18, 20 | 62 | 257 | 90 | 48 | 8.5 |
| 8-023-22 | 15.0 | 22 | 63 | 304 | 80 | 49 | 11.0 |
| 8-023-26 | 21.2 | 26 | 69 | 329 | 99 | 56 | 15.0 |


★ Design factor 4:1 proof tested and certified.

Tested acc. to EN 1677

YOKE's innovative, fine design with " Coupling Pin " system hook is able to solve any of your problems in Chain, Wire Rope and Synthetic Slings.

The hook :

1. Create safer lifting with the use of " Self Locking " system.
2. Assembly is fast and easy with only a hammer required.
3. Acquired certificate approved by BG German company.
4. **Patent** :Taiwan, China, France, Germany, Italy, Japan,USA, Switzerland

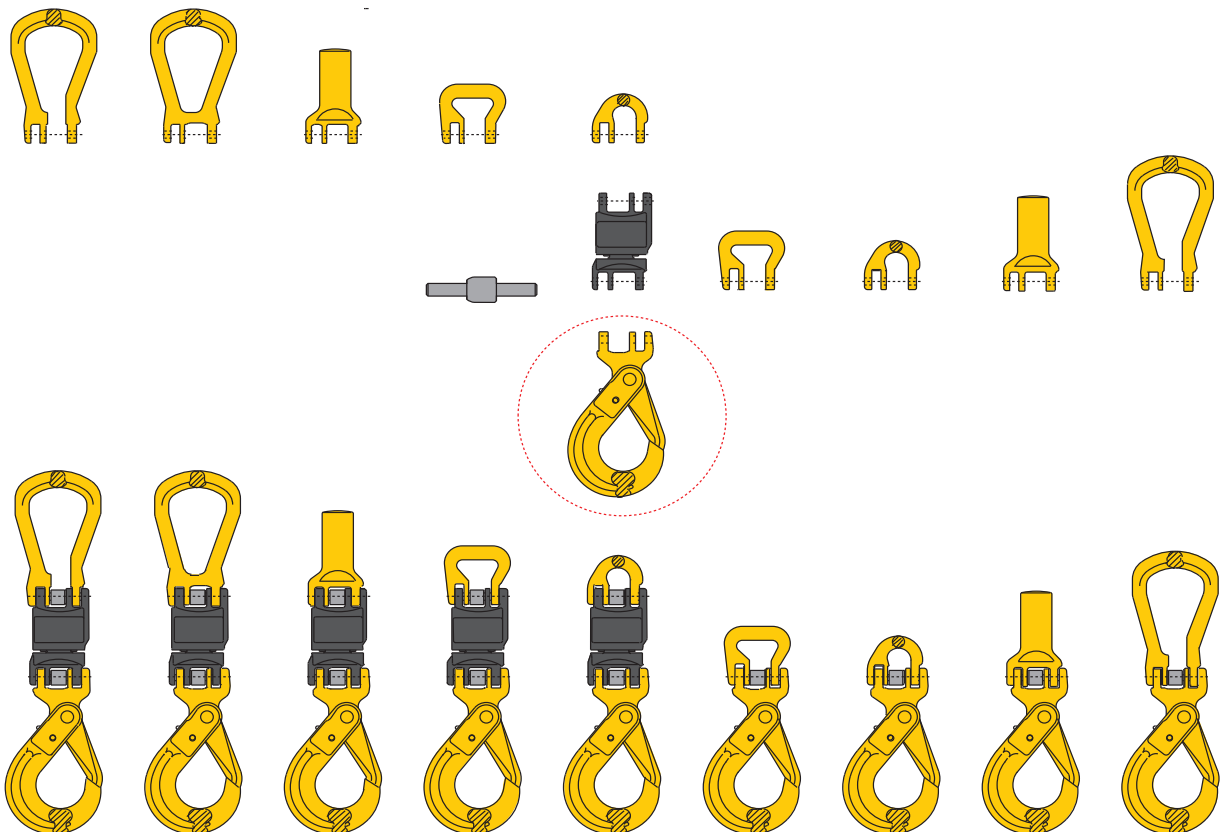

Industrial Rigging & Supply