


BB Sheaves, Wood Blocks and SS Pulleys




Sheave Bronze Bushed

Sheave	Bore dia.	Wire size	Pcs/box
3"	15 mm	5/16"	25
4"	20 mm	3/8"	25
5"	24 mm	1/2"	13
6"	32.5 mm	5/8"	5
8"	35 mm	7/8"	5

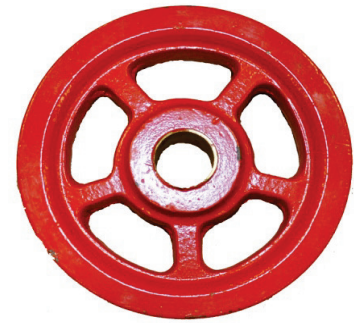

WOOD BLOCKS & S/S PULLEY BLOCKS

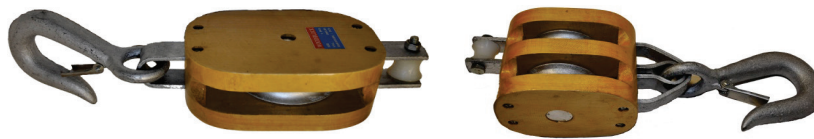

Wood Blocks - For use with fiber rope



Shell Size	Rope Dia.	Sheave Size			Wt. lbs	Single Blocks	
		O.D.	Rim	Pin		WLL lbs (4:1)	WLL lbs (4:1)
3"	3/8"	1-3/4"	1/2"	3/8"	1	500	800
4"	1/2"	2-1/4"	5/8"	3/8"	2	1000	1400
5"	5/8"	3"	3/4"	3/8"	2.5	1200	1800
6"	3/4"	3-1/2"	1"	1/2"	4	1800	2500
8"	1"	4-3/4"	1-1/8"	5/8"	9.5	2800	3800

Double Blocks

WLL lbs (4:1)
800
1400
1800
2500
3800



Stainless Steel Pulley Block - For use with fiber rope



Rope Size	Break Load	Diameter
3/8"	1900	1-1/4"
5/8"	3200	2"



WARNING

A potential hazard exists when lifting or dragging heavy loads with tackle block assemblies. Failure to design and use tackle block systems properly may cause a load to slip or fall, the result could be serious injury or death. A tackle block system should be rigged by a qualified person as defined by ANSI/ASME B30.



Industrial Rigging & Supply