


Galvanized Screw Pin Shackle (6:1 Design Factor)

READ WARNING AND APPLICATION INFORMATION REGARDING SHACKLES

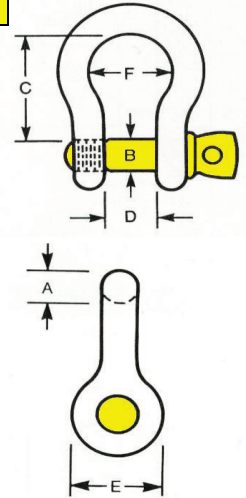

- "OCEAN"
- Size
- Alloy Pin ID
- WLL (Working Load Limit)
- Production Code – Traceable to certificate & material
- Powder Coated "Yellow Pin" for instant recognition

® Trademark – Yellow Pin Shackle – Registration Number - ® TMA 862,758

Federal Specification RR-C-271D, Type IVA, Grade A, Class 2.

Forged – Quenched and Tempered, Alloy Pins.

To assure traceability, "Yellow Pin" shackles are embossed to exceed ASME B30.26 requirements.

Size inches	WLL tonne	Dimensions inch						Weight (lbs)
		A	B	C	D	E	F	
3/16"	1/3	0.19	0.25	0.88	0.38	0.56	0.60	0.06
1/4"	1/2	0.25	0.31	1.13	0.47	0.61	0.78	0.10
5/16"	3/4	0.31	0.38	1.22	0.53	0.75	0.84	0.19
3/8"	1	0.38	0.44	1.44	0.66	0.91	1.03	0.31
7/16"	1 1/2	0.44	0.50	1.69	0.75	1.06	1.16	0.38
1/2"	2	0.50	0.63	1.88	0.81	1.19	1.31	0.72
5/8"	3 1/4	0.63	0.75	2.38	1.06	1.50	1.69	1.37
3/4"	4 3/4	0.75	0.88	2.81	1.25	1.81	2.00	2.35
7/8"	6 1/2	0.88	1.00	3.31	1.44	2.09	2.28	3.62
1"	8 1/2	1.00	1.13	3.75	1.69	2.38	2.69	5.03
1-1/8"	9 1/2	1.16	1.25	4.25	1.81	2.69	2.91	7.41
1-1/4"	12	1.29	1.38	4.69	2.03	3.00	3.25	9.05
1-3/8"	13 1/2	1.42	1.50	5.25	2.25	3.31	3.63	13.53
1-1/2"	17	1.54	1.63	5.75	2.38	3.63	3.88	17.20
1-3/4"	25	1.84	2.00	7.00	2.88	4.19	5.00	27.78
2"	35	2.08	2.25	7.75	3.25	4.81	5.75	45.00
2-1/2"	55	2.71	2.75	10.50	4.13	5.69	7.25	85.75



Industrial Rigging & Supply