

# Yoke Swivel Hoist Ring UNC c/w Alloy Steel Washer




## ★ Safety Factor 5:1

\* Proof Load is 2.5 times the Working Load Limit on the 4:1 design factor.

\*\* Bolt in GEOMET® finished on request

§ Long Bolts are designed for soft metal work piece.

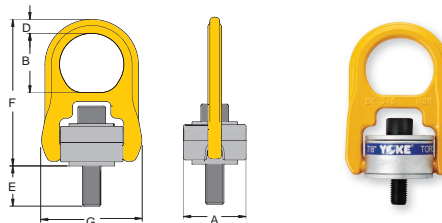

-40°C

Item No.	Working Load Limit		Bolt Size	Dimensions (inch)					Torque in ft. lbs	N.W. lbs	
	lbs*			A	B	D	E	F			G
8-204-004	800		5/16 - 18UNC	1.57	1.61	0.35	0.71	4.02	2.56	7	0.9
8-204-005	1000		3/8 - 16UNC	1.57	1.61	0.35	0.71	4.02	2.56	12	0.9
8-204-010	2500		1/2 - 13UNC	2.56	2.32	0.59	0.75	6.26	4.13	28	3.7
§ 8-204-010L	2500		1/2 - 13UNC	2.56	2.32	0.59	1.26	6.26	4.13	28	3.7
8-204-019	4000		5/8 - 11UNC	2.56	2.32	0.59	0.74	6.26	4.13	60	4.0
§ 8-204-019L	4000		5/8 - 11UNC	2.56	2.32	0.59	1.75	6.26	4.13	60	4.0
8-204-021	5000		3/4 - 10UNC	2.56	2.87	0.59	1.24	6.26	4.13	100	4.0
§ 8-204-021L	5000		3/4 - 10UNC	2.56	2.87	0.59	1.73	6.26	4.13	100	4.2
8-204-030	7000		3/4 - 10UNC	3.35	2.87	0.59	0.87	6.26	5.28	100	8.8
§ 8-204-030L	7000		3/4 - 10UNC	3.35	2.87	0.87	1.87	8.03	5.28	100	9.5
8-204-042	8000		7/8 - 9UNC	3.35	2.87	0.87	1.43	8.03	5.28	160	9.3
§ 8-204-042L	8000		7/8 - 9UNC	3.35	2.87	0.87	2.37	8.03	5.28	160	9.7
8-204-045	10000		1 - 8UNC	3.35	2.87	0.87	1.36	8.03	5.28	230	9.5
§ 8-204-045L	10000		1 - 8UNC	3.35	2.87	0.87	2.36	8.03	5.28	230	10.1
8-204-070	15000		1 1/4 - 7UNC	3.95	3.15	1.00	2.22	8.58	6.30	470	14.5
8-204-125	24000		1 1/2 - 6UNC	4.72	4.29	1.38	3.15	12.09	8.66	800	35.2
8-204-135	30000		2 - 4.5UNC	4.72	4.29	1.38	3.17	12.09	8.66	1100	35.2


# Yoke Swivel Hoist Ring Metric c/w Alloy Steel Washer



\* Proof Load is 2.5 times the Working Load Limit on the 4:1 design factor.

\*\* Bolt in GEOMET® finished on request

§ Long Bolts are designed for soft metal work piece.

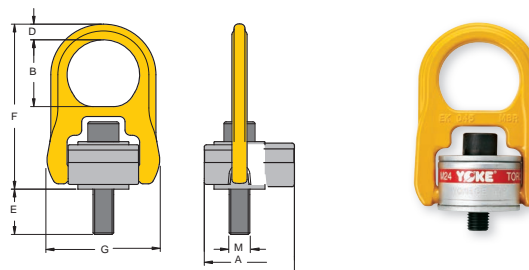

-40°C

Item No.	Working Load Limit		Thread	Dimensions (mm)					Torque in Nm	N.W. kg	
	tonnes*			M	A	B	D	E			F
	5 : 1	4 : 1									
8-203-004	0.40	0.50	M 8	40	41	9	17	102	65	10	0.4
8-203-005	0.45	0.55	M10	40	41	9	11	102	65	16	0.5
§ 8-203-005L	0.45	0.55	M10	40	41	9	26	102	65	16	0.5
8-203-010	1.05	1.30	M12	65	64	15	15	158	105	38	1.7
§ 8-203-010L	1.05	1.30	M12	65	64	15	30	158	105	38	1.7
8-203-019	1.90	2.40	M16	65	64	15	20	158	105	81	1.8
§ 8-203-019L	1.90	2.40	M16	65	64	15	35	158	105	81	1.8
8-203-021	2.15	2.70	M20	65	64	15	25	158	105	136	1.8
§ 8-203-021L	2.15	2.70	M20	65	64	15	45	158	105	136	1.9
8-203-030	3.00	3.75	M20	85	79	19	25	204	134	136	4.0
§ 8-203-030L	3.00	3.75	M20	85	79	19	45	204	134	136	5.2
8-203-042	4.20	5.25	M24	85	79	19	26	204	134	312	4.2
§ 8-203-042L	4.20	5.25	M24	85	79	19	56	204	134	312	4.3
8-203-070	7.00	8.75	M30	100	100	25	81	241	160	637	6.6
8-203-110	11.00	13.75	M36	120	111	30	76	286	194	1005	15.0
8-203-125	12.50	15.60	M42	120	111	30	95	286	220	1005	16.0
8-203-135	13.50	16.90	M48	120	111	30	105	286	220	1350	16.0
8-203-155	15.50	19.40	M56	138	109	34	94	308	241	1350	19.1
8-203-223	22.30	27.90	M64	138	100	38	98	312	241	2847	23.0



Industrial Rigging & Supply